




TABLE 1

ENCLOSURE	H [mm]	CODE	
HC 49/U3	13,2	26	
	10,6	27	starting with 4 MHz
	9,2	28	starting with 10 MHz

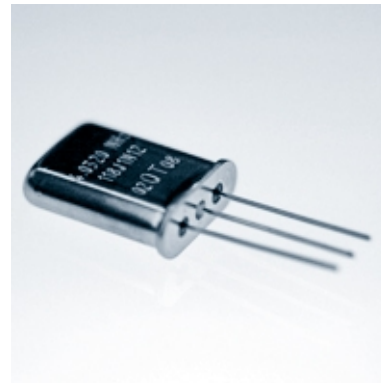

Metal housing: Resistance weld
Inert gas N₂/He
Laser engraving

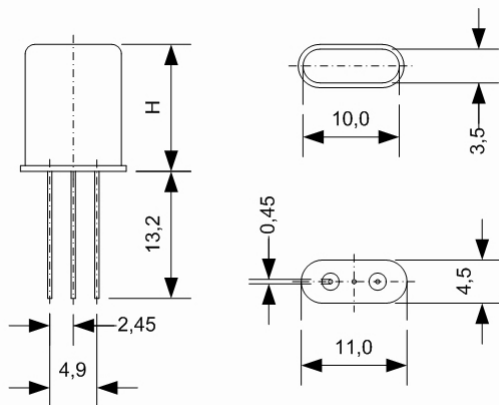


TABLE 2

	1,8 ... 250 MHz	UNIT	CONDITION
Frequency range	1,8 - 250	MHz	
Crystal cut	AT		
Enclosure	HC-49/U3		
Mode	1. 1,8 - 40 3. 15 - 100 5. 45 - 160 7. 100 - 210 9. 140 - 250	MHz MHz MHz MHz MHz	Fundamental mode 3 rd overtone 5 th overtone 7 th overtone 9 th overtone
Load capacitance	10 - 60 pF or Series	pF	
Shunt capacitance	1,8 - 4,0 MHz: < 3,0 pF 4,0 - 10 MHz: < 5,0 pF 10 - 250 MHz: < 7,0pF	pF	
Motional capacitance			
Resistance R _R			see table 5
Frequency adjustment			see table 3
Nominal temperature and temp. tolerance			see table 4
Aging 1 st year	< 2,0 - 3,0	ppm	
Shock	100g / 6ms		
Vibration	10g _{ss} / 1,5mm _{ss} 50 - 500 Hz		
Δf / f	< 5	ppm	
ΔR / R	< 20 %		



Specification: QTC-HC49U3

Crystal unit: HC-49/U3

TABLE 3	FREQUENCY ADJUSTMENT AT +25 ± 2°C	FREQUENCY [MHz]					
		1,8 ... 40	15 ... 100	45 ... 160	100 ... 210	140 ... 250	CODE
	Mode	1	3	5	7	9	
	Frequency adjustment / ppm	± 3	± 3	± 3			C1
		± 5	± 5	± 5	± 5	± 5	E1
		± 10	± 10	± 10	± 10	± 10	J1
		± 20	± 20	± 20	± 20	± 20	B2
		± 50	± 50	± 50	± 50	± 50	H2

TABLE 4		FREQUENCY STABILITY OVER TEMPERATURE RELATED TO +25°C							
		FREQUENCY DEVIATION / ppm							
1,8 ... 4,0 MHz: +		± 3	± 5	± 7	± 10	± 20	± 25	± 30	± 50
4,0 ... 6,0 MHz: x									
6,0 ... 250 MHz: o									
Temperature range	Code	03	05	07	10	12	13	14	20
0 ... + 50°C	B	o	xo	+xo	+xo	+xo	+xo	+xo	+xo
- 10 ... + 60°C	H	o	xo	xo	+xo	+xo	+xo	+xo	+xo
- 20 ... + 70°C	M		o	xo	xo	+xo	+xo	+xo	+xo
- 30 ... + 80°C	R			o	xo	xo	xo	+xo	+xo
- 40 ... + 90°C	U				o	xo	xo	+xo	+xo
- 55 ... + 105°C	W						o	xo	+xo
- 55 ... + 125°C	X							o	xo

TABLE 5	MAX. RESISTANCE R _R	MODE	FREQUENCY [MHz]	R _{RMAX} [Ω]
		1	1,8 - 2,0 2,0 - 3,0 3,0 - 5,0 5,0 - 12 12 - 40	500 300 120 40 15
		3	10 - 20 20 - 100	30 22
		5	45 - 55 55 - 160	70 50
		7	100 - 210	100
		9	140 - 250	180

TABLE 6	ORDERING CODE ⁽¹⁾	FREQUENCY [MHz]	ENCLOSURE CODE: TABLE 1	MODE: 1: FUND. 3,5,7,9: OT TABLE 2	LOAD CAP.: 00: SERIES 32:32 pF TABLE 2	ADJ. TOLERANCE CODE: TABLE 3	TEMP. RANGE CODE: TABLE 4	FREQ. STAB. OVER TEMP. CODE: TABLE 4	SHUNT CAPACITANCE 25: 2,5pF TABLE 2
		12,8	26	1	32	J1	M	10	25

⁽¹⁾ Other specifications on request