


Features

- Low frequency in small size SMD
- Seam sealed ceramic package offers excellent environmental & heat resistance
- Extended temperature -40°C to +85°C for industrial applications


Applications

- Commercial and Industrial applications
- Wireless communications
- PDA and Smartphone
- Time of day applications

General Specifications				
Nominal Frequency	32.768kHz			
Frenquency Tolerance at 25°C	±20ppm			
Temperature Coefficient	-0.034 ± 0.008ppm/∆ ºC²			
Temperature Range (Operating)	-40 to +85ºC			
Storage Temperature	-55 to +125°C			
Load Capacitance C _L	7pF, 9pF, 12.5pF			
Shunt Capacitance C ₀	1.7pF typ.			
Motional Capacitance C ₁	3.0fF typ.			
Equivalent Series Resistance (ESR)	65KΩ max.			
Drive Level	1μW max.			
Aging per Year	±3ppm max.			
Insulation Resistance (MΩ)	500 at 100Vdc ±15Vdc			
Quality Factor	70000 typ.			
Capacitance Ratio	450 typ.			



Part Numbering Guide								
QT Code	Package	Nominal Frequency (in kHz)	Load Capacitance	Operating Temperature Range	Frequency Tolerance	Packaging		
QT = Quarz- technik	TC4 = 1.5x4.1 SMD Tuning Fork	32.768	07 = 7pF 09 = 9pF 12 = 12.5pF	B = -40 to +85°C	1 = ±10ppm 2 = ±20ppm 3 = ±30ppm	R = 3000pcs Tape&Reel		
Example: QTTC432.76812B2R bold letters = recommended standard specifica						ded standard specificatio		

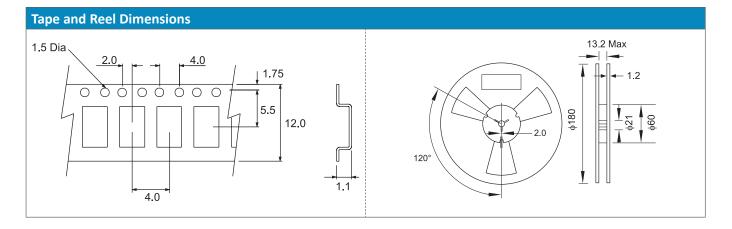









Marking Code Guide

Contains manufacturer code / lot code

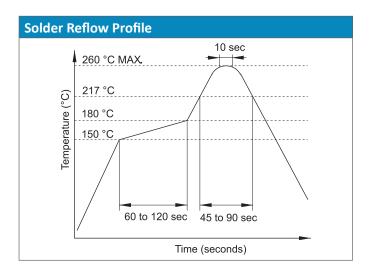

Frequency vs. Temperature Characteristics



To calculate the frequency stability the parabolic curvature constant (K) is needed. For calculating the stability at 45°C? 1- Change in temperature (Δ T) is (45-25) = +20°C 2- Change in frequency is (-0.034 x (Δ °C)²) = (-0.035 x (20)² = -13.6ppm



